

Advantages

- Long life according to EUROBAT Classification
- High discharge performance
- 99%+ gas recombination efficiency
- Maximum charge efficiency
- Low self-discharge rate
- Easy installation and handling


Application

- Telecommunication
- Emergency power
- UPS units
- Electrical Power plants and substation
- Transportation

Standards

- IEC 60896-21/22:2004
- Eurobat guide
- installation compliant with EN50272-2

Drawing

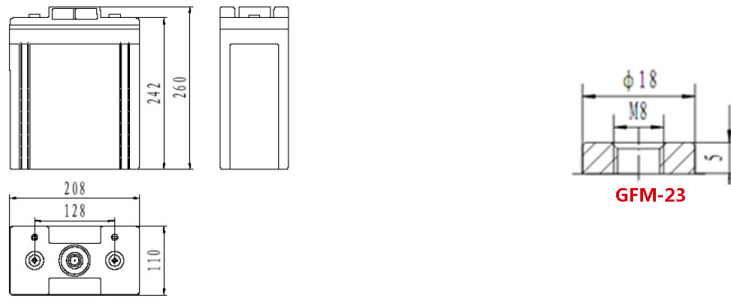

Specification


Battery Model	GFMG-200			
Designed Life(Years)	12			
Capacity(Ah/25°C)	10HR(20A,1.80V)	5HR(35A,1.80V)	3HR(52.7A,1.80V)	1HR(120A,1.75V)
	200	175	158.1	120
Dimensions	Length(mm)	Width(mm)	Height(mm)	Total Height(mm)
	110	208	242	260
Approx.Weight(Kg)	13.5			
Internal Resistance(mΩ)	0.58			
Max. Discharge Current(A/5Sec.)	1100			
Self Discharge(25°C)	<=1% per month			
Charge Voltage(V/25°C)	Cycle use		Float use	
	2.35(-3.5mV/°C),max charge current:40A		2.25(-3.5mV/°C)	

Discharge Data


Constant current discharge data(25°C,A)														
Endvoltage (V/cell)	5min	10min	15min	20min	30min	40min	50min	1h	1.5h	2h	3h	5h	8h	10h
1.60	546	415	338	287	220	178	149	128	97	78	55.9	36.7	25.4	20.7
1.65	496	380	313	267	208	170	143	125	94.7	76.7	55.1	36.3	25.2	20.5
1.67	476	365	301	258	202	166	140	124	93.6	76.1	54.8	36.1	25.1	20.5
1.70	453	349	289	249	196	161	137	122	92.2	75.3	54.4	35.9	24.9	20.4
1.75	396	321	272	237	189	157	134	120	90.8	74	53.5	35.4	24.7	20.2
1.80	348	298	257	226	182	152	130	115	88.3	72.2	52.7	35	24.4	20

Constant power discharge data(25°C,W/Cell)														
Endvoltage (V/cell)	5min	10min	15min	20min	30min	40min	50min	1h	1.5h	2h	3h	5h	8h	10h
1.60	796	673	559	487	371	300	257	224	173	142	102	67.9	48.9	39.8
1.65	731	611	512	449	344	283	244	217	166	137	99.5	66.8	48.3	39.1
1.67	691	590	496	437	332	276	237	214	164	135	98.7	66.5	48.1	39
1.70	645	560	476	420	321	268	231	210	162	133	97.5	65.9	47.7	38.8
1.75	578	518	444	390	301	252	220	201	158	130	95.5	64.6	47.1	38.3
1.80	531	475	407	360	283	238	212	192	153	126	93.5	63.5	46.5	37.7


Performance Curve

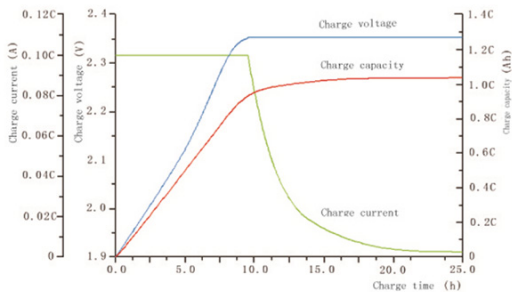


Charge performance

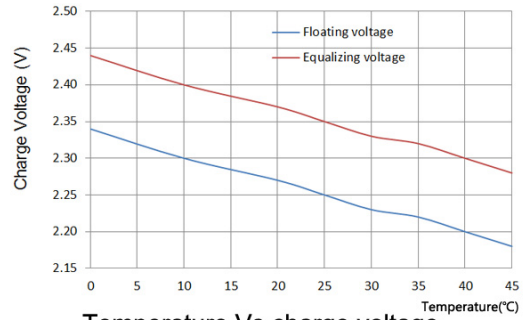

Temperature Vs charge voltage

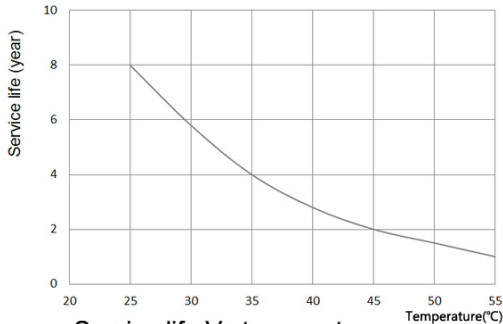

Service life Vs temperature

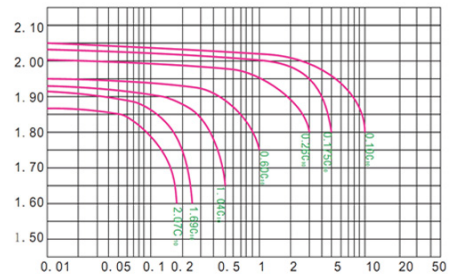

Discharge performance

Sacred Sun Power Source Co.,Ltd.

No.1 Shengyang Road, Qufu City, PRC
Website: www.sacredsunsun.com

Sacred Sun Asia Pacific

10Q,10thFloor, Xinbaohui Building, Nanhai Boulevard,
Nanshan, Shenzhen, PRC.

Sacred Sun Europe SPRL

Paul Dejaerlaan 4b, B 1060 Brussel, Belgium

