

Advantages

- Long life according to EUROBAT Classification
- High discharge performance
- 99%+ gas recombination efficiency
- Maximum charge efficiency
- Low self-discharge rate
- Easy installation and handling


Application

- Telecommunication
- Emergency power
- UPS units
- Electrical Power plants and substation
- Transportation

Standards

- IEC 60896-21/22:2004
- Eurobat guide
- installation compliant with EN50272-2

Drawing

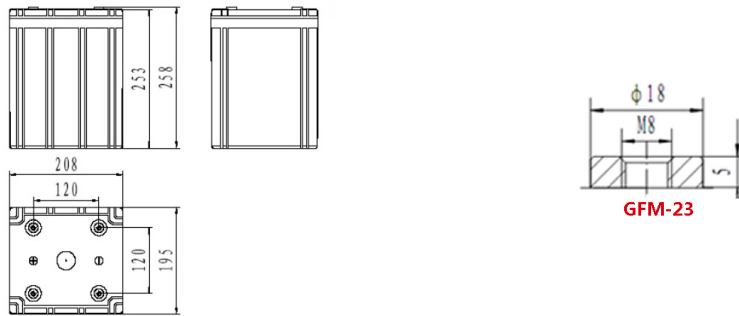

Specification


Battery Model	GFMG-400			
Designed Life(Years)	12			
Capacity(Ah/25°C)	10HR(40A,1.80V)	5HR(70A,1.80V)	3HR(105A,1.80V)	1HR(240A,1.75V)
	400	350	315	240
Dimensions	Length(mm)	Width(mm)	Height(mm)	Total Height(mm)
	195	208	253	258
Approx.Weight(Kg)	25.6			
Internal Resistance(mΩ)	0.42			
Max. Discharge Current(A/5Sec.)	2200			
Self Discharge(25°C)	≤1% per month			
Charge Voltage(V/25°C)	Cycle use		Float use	
	2.35(-3.5mV/°C),max charge current:80A		2.25(-3.5mV/°C)	

Discharge Data


Constant current discharge data(25°C,A)														
Endvoltage (V/cell)	5min	10min	15min	20min	30min	40min	50min	1h	1.5h	2h	3h	5h	8h	10h
1.60	1092	831	677	573	440	357	298	255	194	156	112	73.5	50.8	41.4
1.65	993	761	625	534	415	340	286	251	189	153	110	72.6	50.3	41.1
1.67	951	730	603	517	404	332	280	248	187	152	110	72.2	50.2	41
1.70	906	698	578	497	392	323	274	243	184	151	109	71.8	49.9	40.7
1.75	793	643	545	474	378	314	268	240	182	148	107	70.9	49.4	40.5
1.80	696	595	514	452	364	304	259	230	177	144	105	70	48.8	40

Constant power discharge data(25°C,W/Cell)														
Endvoltage (V/cell)	5min	10min	15min	20min	30min	40min	50min	1h	1.5h	2h	3h	5h	8h	10h
1.60	1591	1347	1118	974	742	601	513	449	346	283	205	136	97.8	79.7
1.65	1462	1223	1024	898	689	566	488	433	333	274	199	134	96.6	78.3
1.67	1382	1180	992	874	664	551	475	428	329	270	197	133	96.2	78
1.70	1290	1120	952	840	643	537	462	421	324	266	195	132	95.4	77.5
1.75	1156	1036	888	781	603	504	441	401	315	260	191	129	94.2	76.5
1.80	1062	950	813	719	565	476	425	383	306	253	187	127	92.9	75.3


Performance Curve

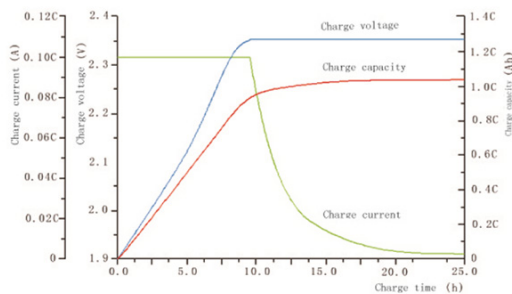


Charge performance

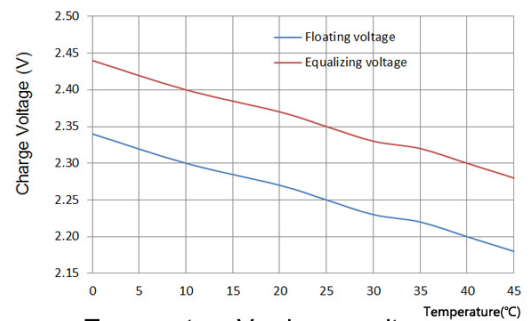

Temperature Vs charge voltage

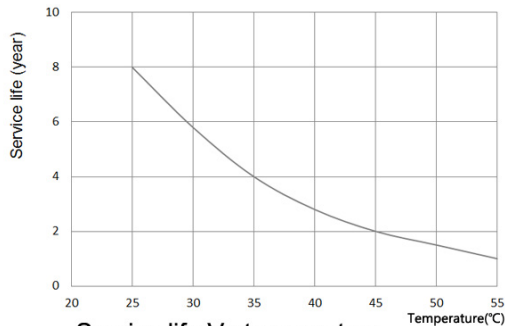

Service life Vs temperature

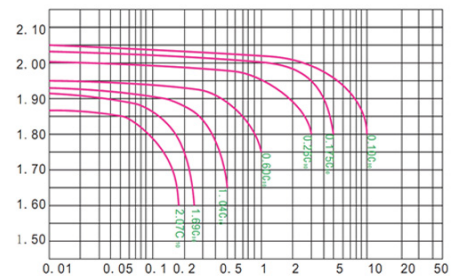

Discharge performance

Sacred Sun Power Source Co.,Ltd.

No.1 Shengyang Road, Qufu City, PRC
Website: www.sacredsunsun.com

Sacred Sun Asia Pacific

10Q,10thFloor, Xinbaohui Building, Nanhai Boulevard,
Nanshan, Shenzhen, PRC.

Sacred Sun Europe SPRL

Paul Dejaerlaan 4b, B 1060 Brussel, Belgium

